

Silicon NPN transistor epitaxial type D5023

[Applications]

General purpose

[Feature]

Low collector saturation voltage $V_{CE(sat)} = 0.8V(\text{Max.})$ at $I_C = 2A, I_B = 0.2A$

[Absolute maximum ratings ($T_a = 25C$)]

Characteristic	Symbol	Maximum ratings	Unit
Collector-base voltage	VCBO	40	V
Collector-emitter voltage	VCEO	32	V
Emitter-base voltage	VEBO	5	V
Collector current	I_C	2	A
Junction temperature	T_j	150	C
Storage temperature	T_{stg}	-55 to 150	C

[Electrical characteristics ($T_a = 25C$)]

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BVCBO	40	-	-	V	$I_C = 50\mu A, I_E = 0A$
Collector-emitter breakdown voltage	BVCEO	32	-	-	V	$I_C = 1mA, I_B = 0A$
Emitter-base breakdown voltage	BVEBO	5	-	-	V	$I_E = 50\mu A, I_C = 0A$
Collector cut-off current	ICBO	-	-	1	μA	$V_{CB} = 20V$
Emitter cut-off current	IEBO	-	-	1	μA	$V_{EB} = 4V$
DC current gain	hFE	82	-	360	-	$V_{CE} = 3V, I_C = 0.5A$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	-	0.8	V	$I_C = 2A, I_B = 0.2A$
Transition frequency	f T	-	100	-	MHz	$V_{CE} = 5V, I_E = -0.5A$
Collector output capacitance	Cob	-	30	-	pF	$V_{CB} = 10V, f = 1MHz, I_E = 0A$

Notice 1) These are measured data of transistors assembled by PHENITEC SEMICONDUCTOR Corp. and are for reference only.

Notice 2) The contents described herein are subject to change without notice.

No. D5023-20080917

Fig.1 IC - VBE(on)
at VCE= 3V, Ta= 25C

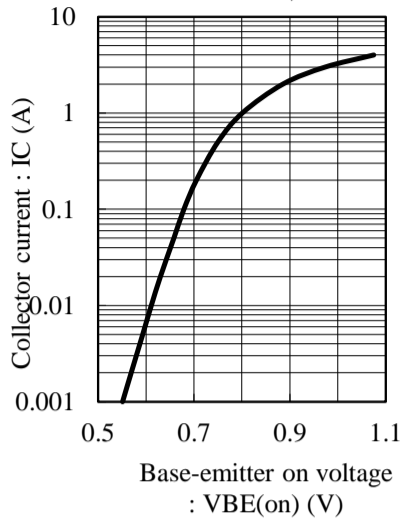


Fig.2 hFE - IC
at VCE= 3V, Ta= 25C

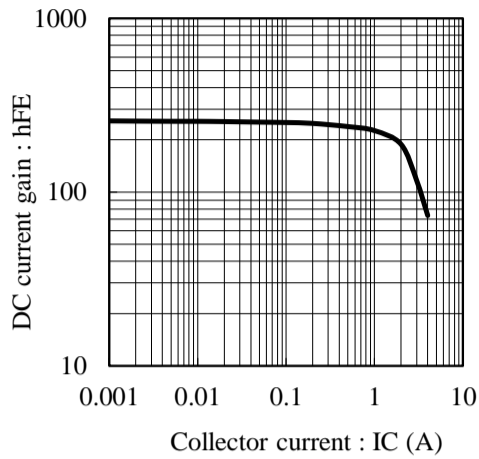


Fig.3 VCE(sat) - IC
at IC/IB= 10, Ta= 25C

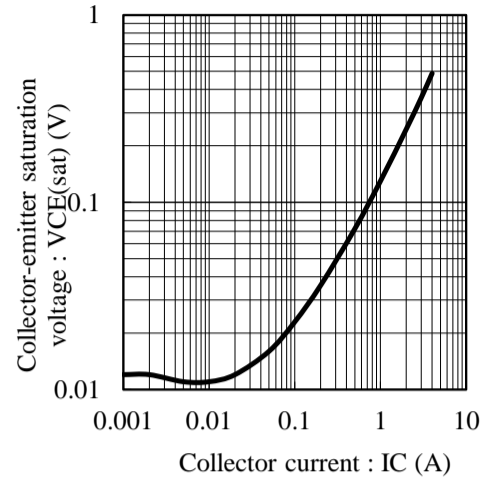


Fig.4 VCE(sat) - IC
at IC/IB= 17.8, Ta= 25C

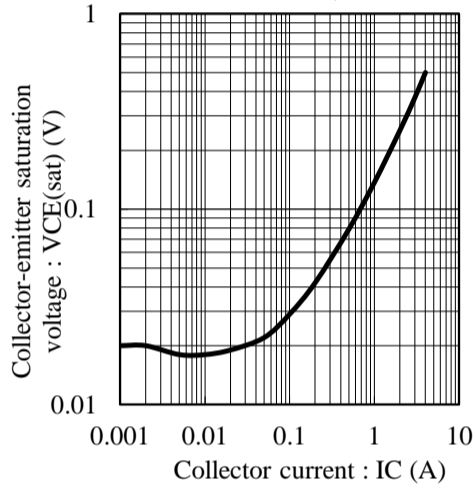


Fig.5 VBE(sat) - IC
at IC/IB= 10, Ta= 25C

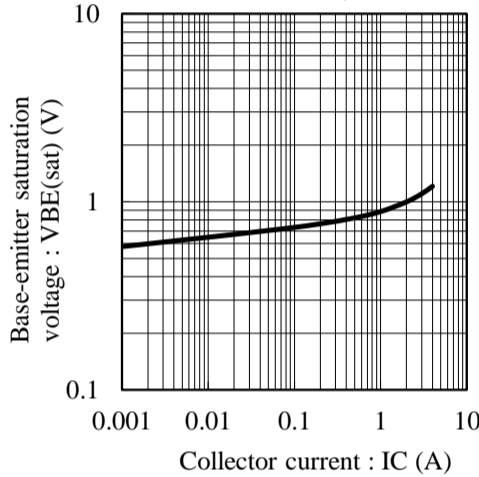


Fig.6 fT - IE
at VCE= 5V, Ta= 25C

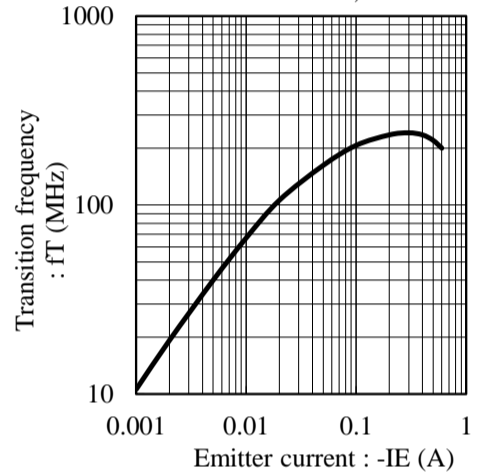


Fig.7 Cob - VCB
at f= 1MHz, Ta= 25C

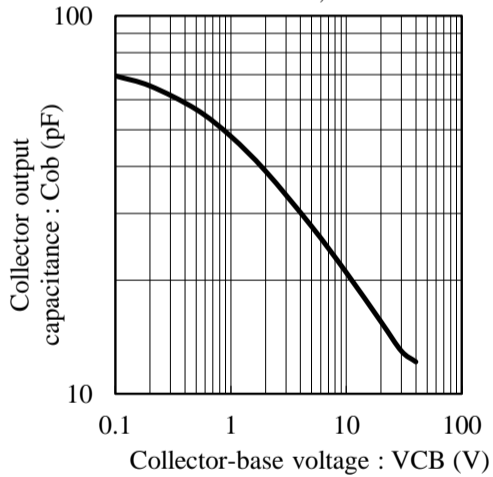


Fig.8 Cib - VEB
at f= 1MHz, Ta= 25C

