

Silicon PNP transistor epitaxial type
A5975

[Applications]

Switching and low frequency signal amplifier

[Feature]

High level collector current $I_C = -500\text{mA}$

High level collector emitter breakdown voltage $BV_{CEO} = -60\text{V}$

Low collector saturation voltage $V_{CE}(\text{sat}) = -0.4\text{V}(\text{Max.})$ at $I_C = -150\text{mA}$, $I_B = -15\text{mA}$

[Absolute maximum ratings ($T_a = 25\text{C}$)]

Characteristic	Symbol	Maximum ratings	Unit
Collector-base voltage	VCBO	-60	V
Collector-emitter voltage	VCEO	-60	V
Emitter-base voltage	VEBO	-5	V
Collector current	I_C	-500	mA
Junction temperature	T_j	150	C
Storage temperature	T_{stg}	-55 to 150	C

[Electrical characteristics ($T_a = 25\text{C}$)]

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BVCBO	-60	-	-	V	$I_C = -10\mu\text{A}$, $I_E = 0\text{A}$
Collector-emitter breakdown voltage	BVCEO	-60	-	-	V	$I_C = -1\text{mA}$, $I_B = 0\text{A}$
Emitter-base breakdown voltage	BVEBO	-5	-	-	V	$I_E = -10\mu\text{A}$, $I_C = 0\text{A}$
Collector cut-off current	ICBO	-	-	-0.1	μA	$V_{CB} = -50\text{V}$, $I_E = 0\text{A}$
Emitter cut-off current	IEBO	-	-	-0.1	μA	$V_{EB} = -3\text{V}$, $I_E = 0\text{A}$
DC current gain	h_{FE}	100	-	300	-	$V_{CE} = -10\text{V}$, $I_C = -150\text{mA}$
Collector-emitter saturation voltage	$V_{CE}(\text{sat})$	-	-	-0.4	V	$I_C = -150\text{mA}$, $I_B = -15\text{mA}$
Base-emitter saturation voltage	$V_{BE}(\text{sat})$	-	-	-1.3	V	$I_C = -150\text{mA}$, $I_B = -15\text{mA}$
Transition frequency	f_T	200	-	-	MHz	$V_{CE} = -20\text{V}$, $I_E = 50\text{mA}$
Collector output capacitance	C_{ob}	-	-	10	pF	$V_{CB} = -10\text{V}$, $f = 1\text{MHz}$, $I_E = 0\text{A}$

Notice 1) These are measured data of transistors assembled by PHENITEC SEMICONDUCTOR Corp. and are for reference only.

Notice 2) The contents described herein are subject to change without notice.

Fig.1 VBE(on) - IC
at VCE= -10V, Ta= 25C

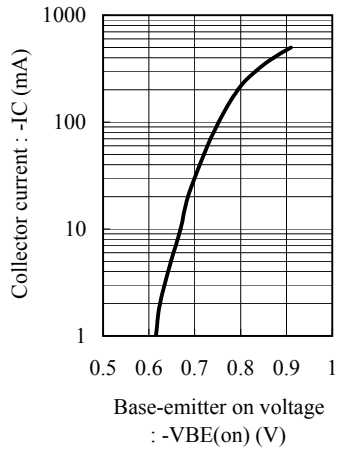


Fig.2 hFE - IC
at VCE= -10V, Ta= 25C

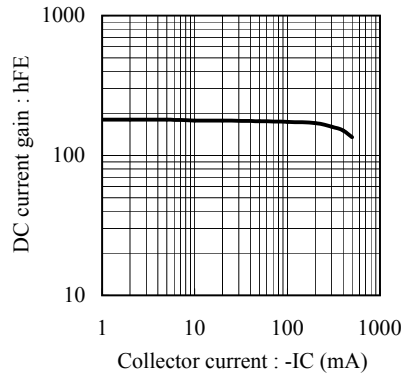


Fig.3 VCE(sat) - IC
at IC/IB= 10, Ta= 25C

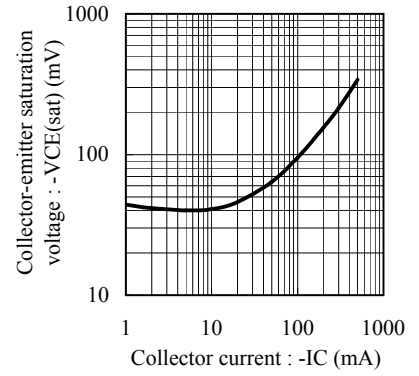


Fig.4 VBE(sat) - IC
at IC/IB= 10, Ta= 25C

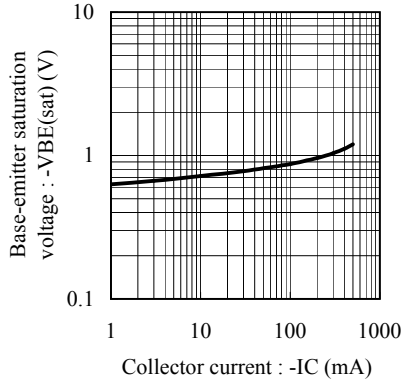


Fig.5 fT - IE
at VCE= -20V, Ta= 25C

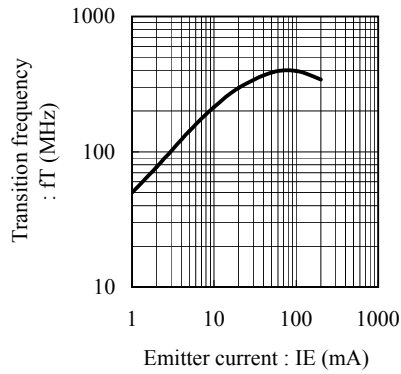


Fig.6 Cob - VCB
at f= 1MHz, Ta= 25C

